

Sarlink® TPE EE-1230N

Teknor Apex Company - Thermoplastic Elastomer

Thursday, June 29, 2017

General Information

General

Material Status	• Commercial: Active		
Availability	• Africa & Middle East • Asia Pacific	• Europe • Latin America	• North America
Uses	• Automotive Exterior Trim		
RoHS Compliance	• RoHS Compliant		
Automotive Specifications	• GM ITTA 8509		
Appearance	• Opaque		
Forms	• Pellets		
Processing Method	• Extrusion		

ASTM & ISO Properties ¹

Physical	Nominal Value	Unit	Test Method
Specific Gravity	1.17		ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 kg)	0.50	g/10 min	ASTM D1238
Elastomers	Nominal Value	Unit	Test Method
Tensile Stress ²			ASTM D412
Across Flow : 100% Strain	46.0	psi	
Flow : 100% Strain	85.0	psi	
Tensile Strength ²			ASTM D412
Across Flow : Break	686	psi	
Flow : Break	382	psi	
Tensile Elongation ²			ASTM D412
Across Flow : Break	950	%	
Flow : Break	740	%	
Tear Strength - Across Flow ²	96.0	lbf/in	ASTM D624
Hardness	Nominal Value	Unit	Test Method
Durometer Hardness ³			ASTM D2240
Shore A, 1 sec, Injection Molded	33		
Shore A, 5 sec, Injection Molded	30		


Processing Information

Injection	Nominal Value	Unit
Rear Temperature	390 to 410	°F
Middle Temperature	400 to 420	°F
Front Temperature	410 to 430	°F
Nozzle Temperature	420 to 440	°F
Processing (Melt) Temp	420 to 440	°F
Mold Temperature	95 to 150	°F
Injection Pressure	200 to 4000	psi
Injection Rate	Fast	
Back Pressure	25.0 to 125	psi
Screw Speed	50 to 120	rpm
Cushion	0.150 to 1.00	in

Injection Notes

Drying is not necessary. However, if moisture is a problem, dry the pellets for 2 to 4 hours at 150°F (65°C).

Revision Date: 6/1/2016

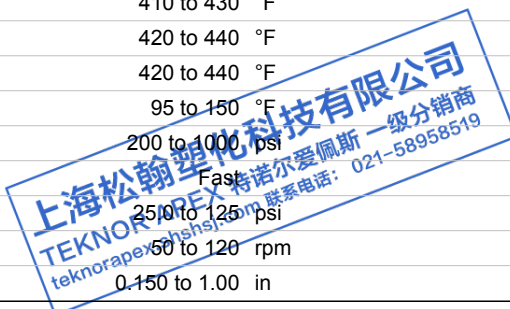

Sarlink® TPE EE-1230N

Teknor Apex Company - Thermoplastic Elastomer

Extrusion	Nominal Value	Unit
Cylinder Zone 1 Temp.	380 to 400	°F
Cylinder Zone 2 Temp.	390 to 410	°F
Cylinder Zone 3 Temp.	400 to 420	°F
Cylinder Zone 5 Temp.	410 to 430	°F
Die Temperature	420 to 440	°F

Extrusion Notes

Screw Speed: 30 to 100 rpm

Notes

¹ Typical properties: these are not to be construed as specifications.

² Die C, 20 in/min

³ Aged for 48 hr

Teknor Apex Company Corporate Headquarters

*In U.S. for Vinyls, TPEs, Colorants,
Engineered Thermoplastics (Chem Polymer)*

505 Central Avenue
Pawtucket, Rhode Island 02861 U.S.

Phone: 401-725-8000
Fax: 401-725-8095
Toll Free (U.S. only) 800-556-3864

info@teknorapex.com

Teknor Apex U.K. Ltd.

Tat Bank Road
Oldbury, West Midlands B69 4NH England

Phone: (44) 121-665-2100
Fax: (44) 121-544-5530

etpsales@teknorapex.co.uk

上海松翰塑化科技有限公司
TEKNOR APEX 特诺尔爱佩斯 一级分销商
teknorapex.shshsj.com 联系电话: 021-58958519

Revision Date: 6/1/2016

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.