

# Elexar® EL-2934N

Teknor Apex Company - Thermoplastic Elastomer

Friday, June 30, 2017

## General Information

### Product Description

Elexar EL-2934N is a high performance UL V-0 flame retardant thermoplastic elastomer designed for electrical applications requiring flexibility over a wide temperature range. Elexar EL-2934N is a high hardness, high density, low flow grade that is UV stabilized and RoHS compliant. This UL listed grade is easily colorable and is suitable for both injection molding and extrusion.

### General


Material Status	• Commercial: Active		
Availability	• Africa & Middle East • Asia Pacific	• Europe • Latin America	• North America
Features	• Brominated • Flame Retardant • General Purpose • Good Colorability • Halogenated	• Heat Aging Resistant • High Density • High Elongation • High Hardness • High Specific Gravity	• High Tensile Strength • Low Flow • Sunlight Resistant (720 hours) • UV Resistant
Uses	• Appliance Wire Insulation • Appliance Wire Jacketing • Cable Jacketing • Connectors	• Flexible Cord Jacketing • Industrial Cable Insulation • Ribbons • Rubber Replacement	• Terminal Cable Jacketing • Underground Power Cable • Wire & Cable Applications • Wire Jacketing
Agency Ratings	• UL 94		
RoHS Compliance	• RoHS Compliant		
Appearance	• Black	• Natural Color	
Forms	• Pellets		
Processing Method	• Extrusion	• Injection Molding	

## ASTM & ISO Properties <sup>1</sup>

Physical	Nominal Value	Unit	Test Method
Specific Gravity	1.30		ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 kg)	0.30	g/10 min	ASTM D1238
Elastomers	Nominal Value	Unit	Test Method
Tensile Strength (Break)	1800	psi	ASTM D412
Tensile Elongation (Break)	600	%	ASTM D412
Tear Strength <sup>2</sup>			ASTM D624
Across Flow : 73°F	225	lbf/in	
Flow : 73°F	251	lbf/in	
Compression Set (257°F, 70 hr)	14	%	ASTM D395
Hardness	Nominal Value	Unit	Test Method
Durometer Hardness			ASTM D2240
Shore A, 1 sec, Injection Molded	90		
Shore A, 5 sec, Injection Molded	88		
Thermal	Nominal Value	Unit	Test Method
Brittleness Temperature	-58.0	°F	ASTM D746
Aging	Nominal Value	Unit	Test Method
Change in Tensile Strength in Air (316°F, 168 hr)	27	%	ASTM D573
Change in Ultimate Elongation in Air (316°F, 168 hr)	7.0	%	ASTM D573
Change in Tensile Strength 140°F, 168 hr, in IRM 902 Oil	-4.0	%	ASTM D471
Change in Ultimate Elongation 140°F, 168 hr, in IRM 902 Oil	-4.0	%	ASTM D471

Revision Date: 2/12/2016

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.

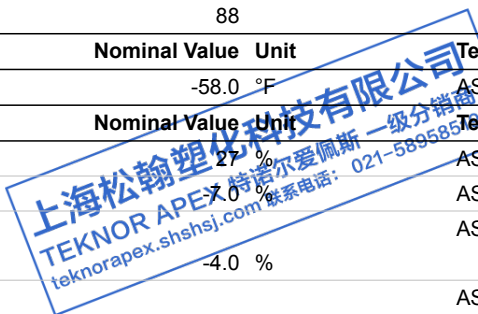

# Elexar® EL-2934N

## Teknor Apex Company - Thermoplastic Elastomer

Electrical	Nominal Value	Unit	Test Method
Volume Resistivity			ASTM D257
73°F	1.7E+16	ohms·cm	
122°F	5.3E+14	ohms·cm	
Dielectric Strength (73°F)	1100	V/mil	ASTM D149
Dielectric Constant			ASTM D150
73°F, 1 MHz	2.53		
73°F, 1 kHz	2.61		
Dissipation Factor			ASTM D150
73°F, 1 MHz	5.8E-3		
73°F, 1 kHz	5.8E-3		
Flammability	Nominal Value	Unit	Test Method
Flame Rating (0.06 in, NT, BK, WT)	V-0		UL 94
Oxygen Index	28	%	ASTM D2863

### Legal Statement

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchaser assumes all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or others. There is no warranty of merchantability and there are no other warranties for the products described. For detailed Product Stewardship information, please contact us. Any product of Teknor Apex, including product names, shall not be used or tested in medical or food contact applications without the prior written acknowledgement of Teknor Apex as to the intended use. Please note that some products may not be available in one or more countries.

### Processing Information

Injection	Nominal Value	Unit
Rear Temperature	390 to 420	°F
Middle Temperature	415 to 430	°F
Front Temperature	430 to 440	°F
Nozzle Temperature	430 to 445	°F
Processing (Melt) Temp	430 to 445	°F
Mold Temperature	77 to 150	°F
Injection Pressure	200 to 1000	psi
Injection Rate	Moderate-Fast	
Back Pressure	25.0 to 50.0	psi
Screw Speed	50 to 100	rpm
Cushion	0.150 to 1.00	in


### Injection Notes

Drying is not necessary. However, if moisture is a problem, dry the pellets for 2 to 4 hours at 150°F (65°C).

Extrusion	Nominal Value	Unit
Cylinder Zone 1 Temp.	380 to 410	°F
Cylinder Zone 2 Temp.	390 to 420	°F
Cylinder Zone 3 Temp.	415 to 430	°F
Cylinder Zone 4 Temp.	415 to 430	°F
Cylinder Zone 5 Temp.	430 to 440	°F
Die Temperature	430 to 445	°F

### Extrusion Notes

Screw Speed: 30 to 100 rpm

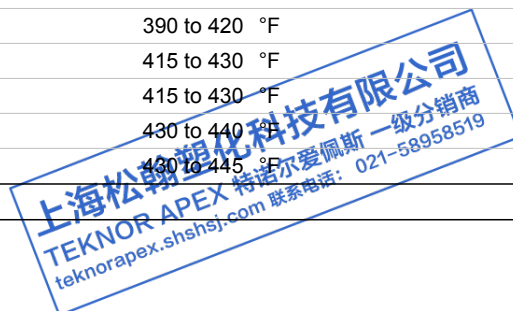

Revision Date: 2/12/2016

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.

# Elexar® EL-2934N

## Teknor Apex Company - Thermoplastic Elastomer

### Notes

<sup>1</sup> Typical properties: these are not to be construed as specifications.

<sup>2</sup> Die C, 20 in/min

---

#### Teknor Apex Company Corporate Headquarters

*In U.S. for Vinyls, TPEs, Colorants,  
Engineered Thermoplastics (Chem Polymer)*  
505 Central Avenue  
Pawtucket, Rhode Island 02861 U.S.

Phone: 401-725-8000  
Fax: 401-725-8095  
Toll Free (U.S. only) 800-556-3864

#### Teknor Apex U.K. Ltd.

Tat Bank Road  
Oldbury, West Midlands B69 4NH England

Phone: (44) 121-665-2100  
Fax: (44) 121-544-5530

etpsales@teknorapex.co.uk

info@teknorapex.com

上海松翰塑化科技有限公司  
TEKNOR APEX 特诺尔爱佩斯 一级分销商  
teknorapex.shshsj.com 联系电话: 021-58958519

Revision Date: 2/12/2016

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.