

# Sarlink® TPV X5725B

Teknor Apex Company - Thermoplastic Vulcanizate

Thursday, June 29, 2017

## General Information

### Product Description


The Sarlink TPV 5700B series are highly engineered extrusion-grade thermoplastic vulcanizates with outstanding UV stability designed for demanding automotive interior and exterior sealing applications, including glass run channels, waistbelts, weather strips, seals and other profiles. Sarlink TPV X5725B is a low hardness, low density, high performance grade with low fogging and excellent color retention and elastic properties.

### General

Material Status	• Commercial: Active	
Availability	• Asia Pacific • Europe	• Latin America • North America
RoHS Compliance	• RoHS Compliant	
Appearance	• Black	• Opaque

## ASTM & ISO Properties <sup>1</sup>

Physical	Nominal Value	Unit	Test Method
Specific Gravity	0.930		ASTM D792
Density	0.930	g/cm <sup>3</sup>	ISO 1183
Elastomers	Nominal Value	Unit	Test Method
Tensile Stress			ASTM D412
Across Flow : 100% Strain	72.5	psi	
Flow : 100% Strain	160	psi	
Tensile Stress			ISO 37
Across Flow : 100% Strain	72.5	psi	
Flow : 100% Strain	160	psi	
Tensile Strength			ASTM D412
Across Flow : Break	363	psi	
Flow : Break	218	psi	
Tensile Stress			ISO 37
Across Flow : Break	363	psi	
Flow : Break	218	psi	
Tensile Elongation			ASTM D412
Across Flow : Break	510	%	
Flow : Break	200	%	
Tensile Elongation			ISO 37
Across Flow : Break	510	%	
Flow : Break	200	%	
Tear Strength - Across Flow	51.0	lbf/in	ASTM D624
Tear Strength - Across Flow <sup>2</sup>	51	lbf/in	ISO 34-1
Compression Set			ASTM D395
73°F, 22 hr	10	%	
158°F, 22 hr	20	%	
257°F, 70 hr	51	%	
Compression Set			ISO 815
73°F, 22 hr	10	%	
158°F, 22 hr	20	%	
257°F, 70 hr	51	%	

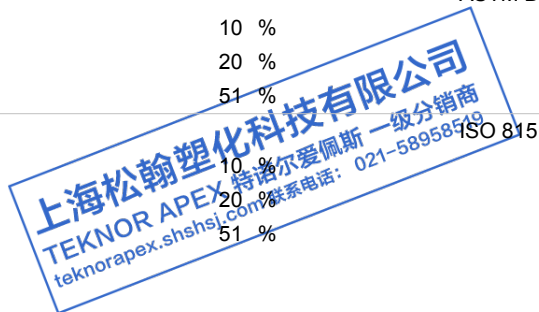

Revision Date: 6/1/2016

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.

# Sarlink® TPV X5725B

## Teknor Apex Company - Thermoplastic Vulcanizate

Hardness	Nominal Value	Unit	Test Method
Durometer Hardness			ASTM D2240
Shore A, 5 sec, Extruded	23		
Shore A, 5 sec, Injection Molded	26		
Shore Hardness			ISO 868
Shore A, 5 sec, Extruded	23		
Shore A, 5 sec, Injection Molded	26		
Aging	Nominal Value	Unit	Test Method
Change in Tensile Strength in Air - Across Flow			ASTM D573
275°F, 1000 hr	-4.0	%	
100% Strain, 275°F, 1000 hr	-7.0	%	
302°F, 168 hr	-4.0	%	
100% Strain, 302°F, 168 hr	-7.0	%	
Change in Tensile Strength in Air - Across Flow			ISO 188
275°F, 1000 hr	-4.0	%	
100% Strain 275°F, 1000 hr	-7.0	%	
302°F, 168 hr	-4.0	%	
100% Strain 302°F, 168 hr	-7.0	%	
Change in Ultimate Elongation in Air - Across Flow			ASTM D573
275°F, 1000 hr	-24	%	
302°F, 168 hr	-18	%	
Change in Tensile Strain at Break in Air - Across Flow			ISO 188
275°F, 1000 hr	-24	%	
302°F, 168 hr	-18	%	
Change in Durometer Hardness in Air			ASTM D573
Shore A, 275°F, 1000 hr	-1.0		
Shore A, 302°F, 168 hr	-3.0		
Change in Shore Hardness in Air			ISO 188
Shore A, 275°F, 1000 hr	-1.0		
Shore A, 302°F, 168 hr	-3.0		
Change in Volume (257°F, 70 hr, in IRM 903 Oil)	71	%	ASTM D471
Change in Volume (257°F, 70 hr, in IRM 903 Oil)	71	%	ISO 1817
Additional Information	Nominal Value	Unit	Test Method
Apparent Shear Viscosity - Capillary @ 206/s			
392°F	140	Pa·s	ISO 11443
392°F	140	Pa·s	ASTM D3835


### Legal Statement

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchaser assumes all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or others. There is no warranty of merchantability and there are no other warranties for the products described. For detailed Product Stewardship information, please contact us. Any product of Teknor Apex, including product names, shall not be used or tested in medical or food contact applications without the prior written acknowledgement of Teknor Apex as to the intended use. Please note that some products may not be available in one or more countries.

### Notes

<sup>1</sup> Typical properties: these are not to be construed as specifications.

<sup>2</sup> Method Ba, Angle (Unnicked)

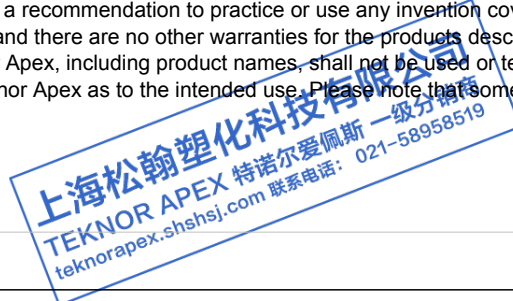

Revision Date: 6/1/2016

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.

# Sarlink® TPV X5725B

## Teknor Apex Company - Thermoplastic Vulcanizate

**Teknor Apex Company**  
**Corporate Headquarters**

*In U.S. for Vinyls, TPEs, Colorants,  
Engineered Thermoplastics (Chem Polymer)*  
505 Central Avenue  
Pawtucket, Rhode Island 02861 U.S.

Phone: 401-725-8000  
Fax: 401-725-8095  
Toll Free (U.S. only) 800-556-3864

**Teknor Apex U.K. Ltd.**

Tat Bank Road  
Oldbury, West Midlands B69 4NH England

Phone: (44) 121-665-2100  
Fax: (44) 121-544-5530

etpsales@teknorapex.co.uk

info@teknorapex.com

上海松翰塑化科技有限公司  
TEKNOR APEX 特诺尔爱佩斯 一级分销商  
teknorapex.shshsj.com 联系电话: 021-58958519

Revision Date: 6/1/2016

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.