

Medalist® MD-50148

Teknor Apex Company - Thermoplastic Elastomer

Thursday, June 29, 2017

General Information

Product Description

Medalist MD-50148 is a clear high performance thermoplastic elastomer specifically designed for healthcare and medical applications. Medalist MD-50148 is a medium hardness, low density, halogen-free grade that is suitable for extrusion or molding.

General

Material Status	• Commercial: Active		
Availability	• Africa & Middle East • Asia Pacific	• Europe • Latin America	• North America
Features	• Chemical Resistant • Good Adhesion • Good Processability	• Good Sterilizability • Halogen Free • Low Density	• Low Specific Gravity • Medium Hardness
Uses	• Medical/Healthcare Applications • Pharmaceuticals		• Rubber Replacement
Agency Ratings	• ISO 13485		
RoHS Compliance	• RoHS Compliant		
Appearance	• Clear/Transparent		
Forms	• Pellets		
Processing Method	• Extrusion	• Injection Molding	

ASTM & ISO Properties¹


Physical	Nominal Value	Unit	Test Method
Specific Gravity	0.880		ASTM D792
Melt Mass-Flow Rate (MFR) (190°C/2.16 kg)	75	g/10 min	ASTM D1238
Elastomers	Nominal Value	Unit	Test Method
Tensile Strength - Flow (Break)	910	psi	ASTM D412
Tensile Elongation - Flow (Break)	680	%	ASTM D412
Hardness	Nominal Value	Unit	Test Method
Durometer Hardness			ASTM D2240
Shore A, 1 sec	62		
Shore A, 5 sec	55		
Shore A, 15 sec	53		

Legal Statement

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchaser assumes all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or others. There is no warranty of merchantability and there are no other warranties for the products described. For detailed Product Stewardship information, please contact us. Any product of Teknor Apex, including product names, shall not be used or tested in medical or food contact applications without the prior written acknowledgement of Teknor Apex as to the intended use. Please note that some products may not be available in one or more countries.

Processing Information

Injection	Nominal Value	Unit
Rear Temperature	260 to 300	°F
Middle Temperature	280 to 320	°F
Front Temperature	300 to 340	°F
Nozzle Temperature	340 to 380	°F
Processing (Melt) Temp	340 to 380	°F
Mold Temperature	70 to 100	°F
Injection Pressure	200 to 800	psi

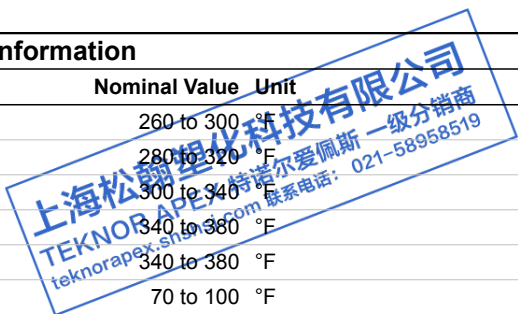

Revision Date: 7/13/2016

Medalist® MD-50148

Teknor Apex Company - Thermoplastic Elastomer

Injection	Nominal Value	Unit
Back Pressure	25.0 to 100	psi
Screw Speed	50 to 100	rpm
Cushion	0.150 to 1.00	in

Injection Notes

Drying is not necessary. However, if moisture is a problem, dry the pellets for 2 to 4 hours at 150°F (65°C).

Extrusion	Nominal Value	Unit
Cylinder Zone 1 Temp.	280 to 300	°F
Cylinder Zone 2 Temp.	300 to 320	°F
Cylinder Zone 3 Temp.	320 to 360	°F
Cylinder Zone 4 Temp.	320 to 360	°F
Cylinder Zone 5 Temp.	340 to 380	°F
Die Temperature	360 to 400	°F

Extrusion Notes

Screw Speed: 30 to 100 rpm

Notes

¹ Typical properties: these are not to be construed as specifications.

Teknor Apex Company Corporate Headquarters

*In U.S. for Vinyls, TPEs, Colorants,
Engineered Thermoplastics (Chem Polymer)*
505 Central Avenue
Pawtucket, Rhode Island 02861 U.S.

Phone: 401-725-8000
Fax: 401-725-8095
Toll Free (U.S. only) 800-556-3864

Teknor Apex U.K. Ltd.

Tat Bank Road
Oldbury, West Midlands B69 4NH England

Phone: (44) 121-665-2100
Fax: (44) 121-544-5530

etpsales@teknorapex.co.uk

info@teknorapex.com

上海松翰塑化科技有限公司
TEKNOR APEX 特诺尔爱佩斯 一级分销商
teknorapex.shshsj.com 联系电话: 021-58958519

Revision Date: 7/13/2016

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.