

# Chemlon® 60CF4

Teknor Apex Company (Chem Polymer) - Polyamide 6

Friday, June 30, 2017

## General Information

### Product Description

60CF4 is a 20% carbon fibre filled grade of nylon 6. It offers outstanding strength and stiffness - coupled with low density and improved electrical conductivity of moulded parts. It is suitable for applications such as bearings and mechanical parts

### General

Material Status	• Commercial: Active
Availability	• Europe
Filler / Reinforcement	• Carbon Fiber, 20% Filler by Weight
Features	• High Stiffness      • High Strength      • Low Density
Uses	• Bearings      • Machine/Mechanical Parts
Processing Method	• Injection Molding

## ASTM & ISO Properties <sup>1</sup>


Physical	Nominal Value	Unit	Test Method
Density	1.22	g/cm <sup>3</sup>	ISO 1183
Water Absorption (Equilibrium, 73°F, 50% RH)	2.4	%	ISO 62
Mechanical	Nominal Value	Unit	Test Method
Tensile Modulus	2.18E+6	psi	ISO 527-2
Tensile Stress	29000	psi	ISO 527-2
Tensile Strain (Break)	4.0	%	ISO 527-2
Flexural Modulus	1.60E+6	psi	ISO 178
Flexural Stress	33400	psi	ISO 178
Impact	Nominal Value	Unit	Test Method
Notched Izod Impact Strength	2.9	ft-lb/in <sup>2</sup>	ISO 180/A
Thermal	Nominal Value	Unit	Test Method
Heat Deflection Temperature (66 psi, Unannealed)	> 392	°F	ISO 75-2/B
Heat Deflection Temperature (264 psi, Unannealed)	> 392	°F	ISO 75-2/A
Electrical	Nominal Value	Unit	Test Method
Volume Resistivity	1.0E+12	ohms·cm	IEC 60093
Flammability	Nominal Value	Unit	Test Method
Flame Rating (0.06 in, Teknor Apex test result)	HB		UL 94

## Processing Information

Injection	Nominal Value	Unit
Drying Temperature	176	°F
Drying Time	2.0	hr
Rear Temperature	482 to 518	°F
Middle Temperature	482 to 518	°F
Front Temperature	482 to 518	°F
Processing (Melt) Temp	482 to 536	°F
Mold Temperature	158 to 194	°F
Injection Rate	Fast	
Back Pressure	Low	
Screw Speed	Moderate	

### Injection Notes

No drying is necessary unless the material has been exposed to air for longer than three hours. The appearance of splash marks on the surface of mouldings indicates excessive moisture is present.

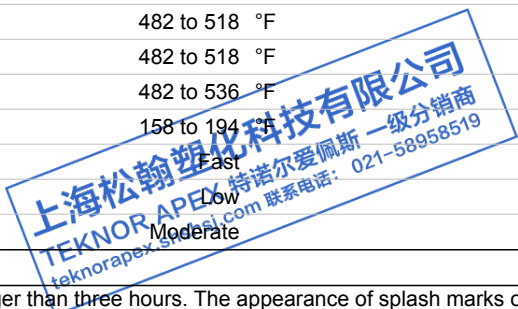

Revision Date: 3/24/2014

# Chemlon® 60CF4

## Teknor Apex Company (Chem Polymer) - Polyamide 6

### Notes

<sup>1</sup> Typical properties: these are not to be construed as specifications.

---

**Teknor Apex Company**  
**Corporate Headquarters**

*In U.S. for Vinyls, TPEs, Colorants,  
Engineered Thermoplastics (Chem Polymer)*

505 Central Avenue  
Pawtucket, Rhode Island 02861 U.S.

Phone: 401-725-8000  
Fax: 401-725-8095  
Toll Free (U.S. only) 800-556-3864

**Teknor Apex U.K. Ltd.**

Tat Bank Road  
Oldbury, West Midlands B69 4NH England

Phone: (44) 121-665-2100  
Fax: (44) 121-544-5530

[etpsales@teknorapex.co.uk](mailto:etpsales@teknorapex.co.uk)

[info@teknorapex.com](mailto:info@teknorapex.com)

上海松翰塑化科技有限公司  
TEKNOR APEX 特诺尔爱佩斯 一级分销商  
[teknorapex.shshsj.com](http://teknorapex.shshsj.com) 联系电话: 021-58958519

Revision Date: 3/24/2014

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.