

Chemlon® 240GH

Teknor Apex Company (Chem Polymer) - Polyamide 6

Friday, June 30, 2017

General Information

Product Description

240GH is a 40% glass fibre reinforced, heat stabilised grade of nylon 6. It is formulated to offer excellent mechanical performance coupled with good surface finish.

General

Material Status	• Commercial: Active
Availability	• Europe
Filler / Reinforcement	• Glass Fiber, 40% Filler by Weight
Additive	• Heat Stabilizer
Features	• Good Surface Finish • Heat Stabilized
Processing Method	• Injection Molding


ASTM & ISO Properties ¹

Physical	Dry	Conditioned	Unit	Test Method
Density	1.45	--	g/cm ³	ISO 1183
Molding Shrinkage ²	0.70 to 1.0	--	%	Internal Method
Water Absorption				ISO 62
Equilibrium, 73°F, 50% RH	1.8	--	%	
Mechanical	Dry	Conditioned	Unit	Test Method
Tensile Modulus	1.60E+6	1.31E+6	psi	ISO 527-2
Tensile Stress	27600	18900	psi	ISO 527-2
Tensile Strain (Break)	3.0	5.0	%	ISO 527-2
Flexural Modulus	1.45E+6	725000	psi	ISO 178
Flexural Stress	37700	21800	psi	ISO 178
Impact	Dry	Conditioned	Unit	Test Method
Notched Izod Impact Strength	7.1	--	ft-lb/in ²	ISO 180/A
Thermal	Dry	Conditioned	Unit	Test Method
Heat Deflection Temperature				ISO 75-2/B
66 psi, Unannealed	> 392	--	°F	
Heat Deflection Temperature				ISO 75-2/A
264 psi, Unannealed	> 392	--	°F	
Electrical	Dry	Conditioned	Unit	Test Method
Surface Resistivity	1.0E+15	--	ohms	IEC 60093
Volume Resistivity	1.0E+17	--	ohms·cm	IEC 60093
Electric Strength (0.118 in)	280	--	V/mil	IEC 60243-1
Comparative Tracking Index	500	--	V	IEC 60112
Flammability	Dry	Conditioned	Unit	Test Method
Flame Rating				UL 94
0.06 in, Teknor Apex test result	HB	--		

Processing Information

Injection

Drying Temperature	176 °F
Drying Time	20 hr
Rear Temperature	482 to 554 °F
Middle Temperature	482 to 554 °F
Front Temperature	482 to 554 °F

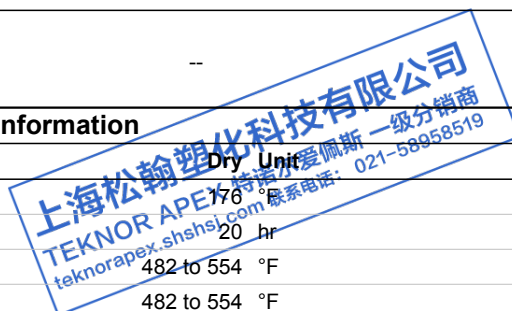

Revision Date: 3/17/2014

Chemlon® 240GH

Teknor Apex Company (Chem Polymer) - Polyamide 6

Injection	Dry Unit
Processing (Melt) Temp	482 to 554 °F
Mold Temperature	140 to 176 °F
Injection Rate	Fast
Back Pressure	Low
Screw Speed	Moderate

Injection Notes

No drying is necessary unless the material has been exposed to air for longer than three hours. The appearance of splash marks on the surface of mouldings indicates excessive moisture is present.

Notes

¹ Typical properties: these are not to be construed as specifications.

² Mould shrinkage is significantly influenced by many factors including wall thickness, gating, moulding shape and processing conditions. The range values given are determined from specimen bar mouldings of 1.5mm to 4mm wall thickness. They are provided as a guide for comparison purposes only and no guarantee should be inferred from their inclusion. (Specimens measured in the dry state, 24 hours after moulding).

Teknor Apex Company Corporate Headquarters

*In U.S. for Vinyls, TPEs, Colorants,
Engineered Thermoplastics (Chem Polymer)*
505 Central Avenue
Pawtucket, Rhode Island 02861 U.S.

Phone: 401-725-8000
Fax: 401-725-8095
Toll Free (U.S. only) 800-556-3864

Teknor Apex U.K. Ltd.

Tat Bank Road
Oldbury, West Midlands B69 4NH England

Phone: (44) 121-665-2100
Fax: (44) 121-544-5530

etpsales@teknorapex.co.uk

info@teknorapex.com

上海松翰塑化科技有限公司
TEKNOR APEX 特诺尔爱佩斯 一级分销商
teknorapex.shshsj.com 联系电话: 021-58958519

Revision Date: 3/17/2014

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.