

Chemlon® 115 G

Teknor Apex Company (Chem Polymer) - Polyamide 66

Friday, June 30, 2017

General Information

General


Material Status	• Commercial: Active
Availability	• Asia Pacific • Europe • North America
Filler / Reinforcement	• Glass Fiber, 15% Filler by Weight
Forms	• Pellets
Processing Method	• Injection Molding

ASTM & ISO Properties ¹

Physical	Nominal Value	Unit	Test Method
Specific Gravity	1.24		ASTM D792
Molding Shrinkage - Flow	3.0E-3 to 7.0E-3	in/in	ASTM D955
Mechanical	Nominal Value	Unit	Test Method
Tensile Strength	17000	psi	ASTM D638
Tensile Elongation (Yield)	3.0	%	ASTM D638
Tensile Elongation (Break)	3.0	%	ASTM D638
Flexural Modulus	700000	psi	ASTM D790
Flexural Strength	25000	psi	ASTM D790
Impact	Nominal Value	Unit	Test Method
Notched Izod Impact (73°F)	1.2	ft-lb/in	ASTM D256
Thermal	Nominal Value	Unit	Test Method
Deflection Temperature Under Load 264 psi, Unannealed	469	°F	ASTM D648
Melting Temperature	495	°F	DSC
Electrical	Nominal Value	Unit	Test Method
Volume Resistivity	1.0E+18	ohms·cm	ASTM D257
Dielectric Strength (0.118 in)	460	V/mil	ASTM D149
Comparative Tracking Index (CTI)	600	V	UL 746
Flammability	Nominal Value	Unit	Test Method
Flame Rating (0.03 in)	HB		UL 94
Oxygen Index	24	%	ASTM D2863
FMVSS Flammability	PASSES		FMVSS 302

Processing Information

Injection	Nominal Value	Unit
Drying Temperature	175	°F
Suggested Max Moisture	0.20	%
Suggested Max Re grind	25	%
Rear Temperature	465 to 495	°F
Middle Temperature	495 to 520	°F
Front Temperature	505 to 535	°F
Nozzle Temperature	505 to 540	°F
Processing (Melt) Temp	505 to 540	°F

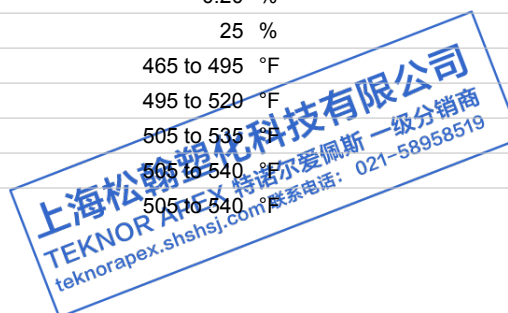

Notes

¹ Typical properties: these are not to be construed as specifications.

Revision Date: 9/13/2012

Chemlon® 115 G

Teknor Apex Company (Chem Polymer) - Polyamide 66

Teknor Apex Company
Corporate Headquarters

*In U.S. for Vinyls, TPEs, Colorants,
Engineered Thermoplastics (Chem Polymer)*
505 Central Avenue
Pawtucket, Rhode Island 02861 U.S.

Phone: 401-725-8000
Fax: 401-725-8095
Toll Free (U.S. only) 800-556-3864

Teknor Apex U.K. Ltd.

Tat Bank Road
Oldbury, West Midlands B69 4NH England

Phone: (44) 121-665-2100
Fax: (44) 121-544-5530

etpsales@teknorapex.co.uk

info@teknorapex.com

上海松翰塑化科技有限公司
TEKNOR APEX 特诺尔爱佩斯 一级分销商
teknorapex.shshsj.com 联系电话: 021-58958519

Revision Date: 9/13/2012

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.