

Sinvicomp SSZ6309 KD11

- Flexible Polyvinyl Chloride

Friday, June 30, 2017

General Information

Product Description

"Sinvicomp"SSZ 6309 KD11 is a wire & cable polyvinylchloride compound available in pellet form. SSZ 6309 KD11 provides good performance for jacketing of cables.

General


Material Status	• Commercial: Active
Availability	• Asia Pacific
Uses	• Wire Jacketing
Wire Types (BS 6746)	• TM1 • TM2
RoHS Compliance	• RoHS Compliant
Forms	• Pellets
Processing Method	• Extrusion

ASTM & ISO Properties ¹

Physical	Nominal Value	Unit	Test Method
Specific Gravity	1.41		ASTM D792
Carbon Black Content	1	%	
Mechanical	Nominal Value	Unit	Test Method
Tensile Strength	2030	psi	IEC 60811-1-1
Tensile Elongation (Break)	250	%	IEC 60811-1-1
Hardness	Nominal Value	Unit	Test Method
Durometer Hardness (Shore A)	78		ASTM D2240
Thermal	Nominal Value	Unit	Test Method
Brittleness Temperature	-18.4	°F	ASTM D746
Aging	Nominal Value	Unit	Test Method
Change in Tensile Strength ² 158°F, 4 hr, in IRM 902 Oil	15	%	IEC 60811-2-1
Change in Ultimate Elongation ² 158°F, 4 hr, in IRM 902 Oil	25	%	IEC 60811-2-1
Mechanical Properties After Aging in Air Oven, 176°F, 168 hr ³			IEC 811-1-2
Change in Tensile Elongation	10	%	
Change in Tensile Strength	5	%	
Electrical	Nominal Value	Unit	Test Method
Volume Resistivity (68°F)	1.0E+13	ohms·cm	BS 2782
Additional Information	Nominal Value	Unit	Test Method
Loss of Mass - 7 days, 80±2°C ⁴ (176°F)	0.500	mg/cm ²	IEC 811-3-2

Typical temperature profile for processing SINVICOMP compound is from 150°C to 175°C. The optimum temperatures depend on the type of machine as well as screw design being used to process SINVICOMP.

Feeding zone: 150°C
 Compression zone: 160°C~170°C
 Mixing zone: 170°C~175°C
 Nozzle/Die Zone: 175°C

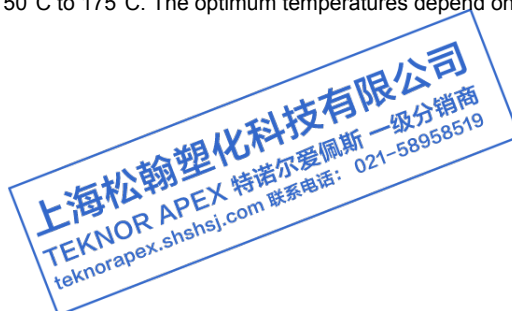

Revision Date: 9/27/2016

Sinvicomp SSZ6309 KD11

- Flexible Polyvinyl Chloride

Notes

¹ Typical properties: these are not to be construed as specifications.

² 70±2°C

³ 80±2°C

⁴ 7 days, 80±2°C

Teknor Apex Company
Corporate Headquarters

*In U.S. for Vinyls, TPEs, Colorants,
Engineered Thermoplastics (Chem Polymer)*
505 Central Avenue
Pawtucket, Rhode Island 02861 U.S.

Phone: 401-725-8000
Fax: 401-725-8095
Toll Free (U.S. only) 800-556-3864

info@teknorapex.com

Teknor Apex U.K. Ltd.

Tat Bank Road
Oldbury, West Midlands B69 4NH England

Phone: (44) 121-665-2100
Fax: (44) 121-544-5530

etpsales@teknorapex.co.uk

上海松翰塑化科技有限公司
TEKNOR APEX 特诺尔爱佩斯 一级分销商
teknorapex.shshsj.com 联系电话: 021-58958519

Revision Date: 9/27/2016

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.