

# Fireguard® 910-LBF

Teknor Apex Company - Flexible Polyvinyl Chloride

Friday, June 30, 2017

## General Information


General			
Material Status	• Commercial: Active		
Availability	• Africa & Middle East • Asia Pacific	• Europe • Latin America	• North America
Features	• Bromine Free	• Flame Retardant	• Low Smoke Emission
Uses	• Insulation • Plenum Cable Jacketing		
Wire Types	• CL2P • CL3P	• CMP • FPLP	• MPP • OFNP
Agency Ratings	• NEC Article 725 • NEC Article 760 • NEC Article 770	• NEC Article 800 • UL 13 • UL 1424	• UL 1651 • UL 444 • UL QMTM2
RoHS Compliance	• RoHS Compliant		
Appearance	• Opaque		
Forms	• Pellets		
Processing Method	• Extrusion		

## ASTM & ISO Properties <sup>1</sup>

Physical	Nominal Value	Unit	Test Method
Specific Gravity	1.58		ASTM D792
Mechanical	Nominal Value	Unit	Test Method
Tensile Strength (Break)	2570	psi	ASTM D638
Tensile Elongation (Break)	190	%	ASTM D638
Hardness	Nominal Value	Unit	Test Method
Durometer Hardness			ASTM D2240
Shore C	92		
Shore C, 10 sec	87		
Thermal	Nominal Value	Unit	Test Method
Continuous Use Temperature	167	°F	ASTM D794
Brittleness Temperature	23.0	°F	ASTM D746
Electrical	Nominal Value	Unit	Test Method
Dielectric Constant			ASTM D150
1 kHz	4.47		
1 MHz	3.49		
Dissipation Factor			ASTM D150
1 kHz	0.072		
1 MHz	0.033		
Flammability	Nominal Value	Unit	Test Method
Oxygen Index	43	%	ASTM D2863

### Additional Information

Cone Calorimeter, Peak Heat Release Rate: 106 kW/m<sup>2</sup>  
 Cone Calorimeter, Average Heat Release Rate: 59 kW/m<sup>2</sup>  
 Cone Calorimeter, Total Heat Released: 70 MJ/m<sup>2</sup>  
 Cone Calorimeter, Average Specific Extinction Area: 348 m<sup>2</sup>/kg  
 Cone Calorimeter, Peak Smoke: 2 l/m  
 Dynamic Heat Stability @ 205°, 100 RPM, 72 gr. #5 Bowl: 37 min to Decomposition  
 Kayeness ACR @ 370°F: 271 Pa-s  
 TA Six-Digit Code: 128-702

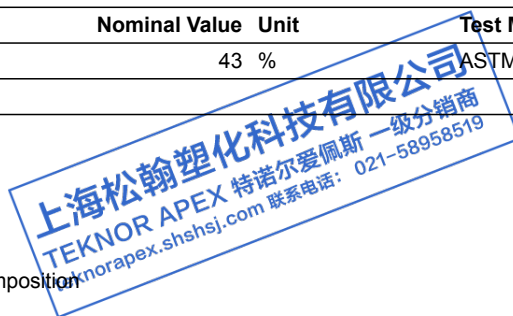

Revision Date: 12/12/2013

# Fireguard® 910-LBF

## Teknor Apex Company - Flexible Polyvinyl Chloride

### Processing Information

Extrusion	Nominal Value	Unit
Melt Temperature	385	°F

#### Notes

<sup>1</sup> Typical properties: these are not to be construed as specifications.

#### Teknor Apex Company Corporate Headquarters

*In U.S. for Vinyls, TPEs, Colorants,  
Engineered Thermoplastics (Chem Polymer)*  
505 Central Avenue  
Pawtucket, Rhode Island 02861 U.S.

Phone: 401-725-8000  
Fax: 401-725-8095  
Toll Free (U.S. only) 800-556-3864

#### Teknor Apex U.K. Ltd.

Tat Bank Road  
Oldbury, West Midlands B69 4NH England

Phone: (44) 121-665-2100  
Fax: (44) 121-544-5530

etpsales@teknorapex.co.uk

info@teknorapex.com

上海松翰塑化科技有限公司  
TEKNOR APEX 特诺尔爱佩斯 一级分销商  
teknorapex.shshsj.com 联系电话: 021-58958519

Revision Date: 12/12/2013

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.