

Sarlink® TPE FM-2669 (PRELIMINARY DATA)

Teknor Apex Company - Thermoplastic Elastomer

Friday, June 30, 2017

General Information

Product Description

Sarlink TPE FM-2669 is a general purpose thermoplastic elastomer available in Nat, Blk, and colors, used in a variety of automotive interior applications including floor mats. Sarlink TPE FM-2669 is a UV stabilized, medium hardness, high density, wear-resistant grade suitable for extrusion, injection molding, or thermoforming.

General

Material Status	• Preliminary Data		
Availability	• Africa & Middle East • Asia Pacific	• Europe • Latin America	• North America
Features	• Chemical Resistant • Filled • Good Adhesion • Good Colorability	• Good Processability • Good Toughness • High Density • High Specific Gravity	• Low Flow • Medium Hardness • UV Resistant • Wear Resistant
Uses	• Automotive Applications	• Automotive Interior Parts	• Rubber Replacement
RoHS Compliance	• RoHS Compliant		
Appearance	• Black	• Colors Available	• Natural Color
Forms	• Pellets		
Processing Method	• Extrusion	• Injection Molding	• Thermoforming

ASTM & ISO Properties ¹

Physical	Nominal Value	Unit	Test Method
Density	1.15	g/cm ³	ISO 1183
Melt Mass-Flow Rate (MFR) (230°C/2.16 kg)	0.10	g/10 min	ASTM D1238
Elastomers	Nominal Value	Unit	Test Method
Tensile Stress (Break)	870	psi	ISO 37
Tensile Elongation (Break)	500	%	ISO 37
Hardness	Nominal Value	Unit	Test Method
Shore Hardness			ISO 868
Shore A, 1 sec, Injection Molded	79		
Shore A, 5 sec, Injection Molded	75		
Shore A, 15 sec, Injection Molded	74		

Legal Statement


The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchaser assumes all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or others. There is no warranty of merchantability and there are no other warranties for the products described. For detailed Product Stewardship information, please contact us. Any product of Teknor Apex, including product names, shall not be used or tested in medical or food contact applications without the prior written acknowledgement of Teknor Apex as to the intended use. Please note that some products may not be available in one or more countries.

Processing Information

Injection	Nominal Value	Unit
Rear Temperature	440 to 480	°F
Middle Temperature	440 to 480	°F
Front Temperature	440 to 480	°F
Nozzle Temperature	440 to 480	°F
Processing (Melt) Temp	440 to 480	°F
Mold Temperature	60 to 90	°F
Injection Pressure	200 to 1000	psi

Revision Date: 6/1/2016

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.

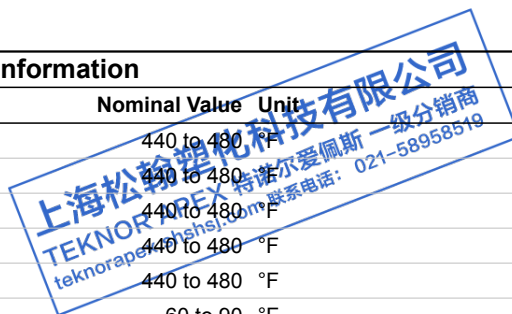

Sarlink® TPE FM-2669 (PRELIMINARY DATA)

Teknor Apex Company - Thermoplastic Elastomer

Injection	Nominal Value	Unit
Injection Rate	Fast	
Back Pressure	25.0 to 125	psi
Screw Speed	50 to 120	rpm
Cushion	0.150 to 1.00	in

Injection Notes

Drying is not necessary. However, if moisture is a problem, dry the pellets for 2 to 4 hours at 150°F (65°C).

Extrusion	Nominal Value	Unit
Cylinder Zone 1 Temp.	420 to 460	°F
Cylinder Zone 2 Temp.	420 to 460	°F
Cylinder Zone 3 Temp.	420 to 460	°F
Cylinder Zone 4 Temp.	420 to 460	°F
Cylinder Zone 5 Temp.	420 to 460	°F
Die Temperature	420 to 460	°F

Extrusion Notes

Screw Speed: 30 to 100 rpm

Notes

¹ Typical properties: these are not to be construed as specifications.

Teknor Apex Company Corporate Headquarters

*In U.S. for Vinyls, TPEs, Colorants,
Engineered Thermoplastics (Chem Polymer)*
505 Central Avenue
Pawtucket, Rhode Island 02861 U.S.

Phone: 401-725-8000
Fax: 401-725-8095
Toll Free (U.S. only) 800-556-3864

info@teknorapex.com

Teknor Apex U.K. Ltd.

Tat Bank Road
Oldbury, West Midlands B69 4NH England

Phone: (44) 121-665-2100
Fax: (44) 121-544-5530

etpsales@teknorapex.co.uk



Revision Date: 6/1/2016

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.