

Medalist® MD-125

Teknor Apex Company - Thermoplastic Elastomer

Thursday, June 29, 2017

General Information

Product Description

This compound is designed for medical and healthcare applications including tubing.

General

Material Status	• Commercial: Active		
Availability	• Africa & Middle East • Asia Pacific	• Europe • Latin America	• North America
Uses	• Medical/Healthcare Applications • Pharmaceuticals		
Agency Ratings	• ISO 10993 Part 5		
RoHS Compliance	• RoHS Compliant		
Appearance	• Translucent		
Forms	• Pellets		
Processing Method	• Extrusion	• Injection Molding	

ASTM & ISO Properties ¹


Physical	Nominal Value	Unit	Test Method
Specific Gravity	0.880		ASTM D792
Melt Mass-Flow Rate (MFR) (200°C/5.0 kg)	2.0	g/10 min	ASTM D1238
Molding Shrinkage - Flow	0.036	in/in	ASTM D955
Molding Shrinkage - Across Flow	0.032	in/in	ASTM D955
Elastomers	Nominal Value	Unit	Test Method
Tensile Stress (100% Strain)	160	psi	ASTM D412
Tensile Stress (200% Strain)	265	psi	ASTM D412
Tensile Stress (300% Strain)	395	psi	ASTM D412
Tensile Strength (Break)	1350	psi	ASTM D412
Tensile Elongation (Break)	780	%	ASTM D412
Tear Strength	125	lbf/in	ASTM D624
Compression Set (73°F, 22 hr)	13	%	ASTM D395
Hardness	Nominal Value	Unit	Test Method
Durometer Hardness (Shore A)	43		ASTM D2240

Processing Information

Injection	Nominal Value	Unit
Rear Temperature	280 to 320	°F
Middle Temperature	320 to 360	°F
Front Temperature	340 to 380	°F
Nozzle Temperature	380 to 420	°F
Processing (Melt) Temp	380 to 420	°F
Mold Temperature	70 to 100	°F
Injection Pressure	200 to 800	psi
Back Pressure	25.0 to 100	psi
Screw Speed	50 to 100	rpm
Cushion	0.150 to 1.00	in

Injection Notes

Drying is not necessary. However, if moisture is a problem, dry the pellets for 2 to 4 hours at 150°F (65°C).

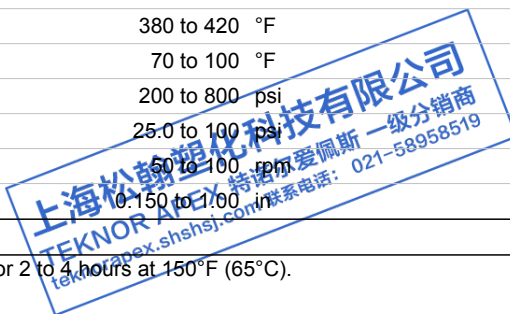

Medalist® MD-125

Teknor Apex Company - Thermoplastic Elastomer

Extrusion	Nominal Value	Unit
Cylinder Zone 1 Temp.	280 to 300	°F
Cylinder Zone 2 Temp.	300 to 320	°F
Cylinder Zone 3 Temp.	320 to 360	°F
Cylinder Zone 5 Temp.	340 to 380	°F
Die Temperature	360 to 400	°F

Extrusion Notes

Screw Speed: 30 to 100 rpm

Notes

¹ Typical properties: these are not to be construed as specifications.

Teknor Apex Company Corporate Headquarters

*In U.S. for Vinyls, TPEs, Colorants,
Engineered Thermoplastics (Chem Polymer)*

505 Central Avenue
Pawtucket, Rhode Island 02861 U.S.

Phone: 401-725-8000
Fax: 401-725-8095
Toll Free (U.S. only) 800-556-3864

info@teknorapex.com

Teknor Apex U.K. Ltd.

Tat Bank Road
Oldbury, West Midlands B69 4NH England

Phone: (44) 121-665-2100
Fax: (44) 121-544-5530

etpsales@teknorapex.co.uk

上海松翰塑化科技有限公司
TEKNOR APEX 特诺尔爱佩斯 一级分销商
teknorapex.shshsj.com 联系电话: 021-58958519

Revision Date: 6/1/2016

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.