

Sarlink® TPV 2940DN-1

Teknor Apex Company - Thermoplastic Vulcanizate

Thursday, June 29, 2017

General Information

Product Description

Sarlink TPV 2940DN-1 is a high performance thermoplastic vulcanizate used in automotive and industrial applications. Sarlink TPV 2940DN-1 is a high hardness, medium density, RoHS compliant grade suitable for extrusion processing.

General

Material Status	• Commercial: Active		
Availability	• Africa & Middle East • Asia Pacific	• Europe • Latin America	• North America
Features	• Abrasion Resistant • Good Heat Resistance • High Hardness	• High Melt Strength • High Scratch Resistance • Light Stabilized	• Low Flow • Lubricated • Medium Density
Uses	• Expansion Joint • Gaskets • Glazing	• Grommets • Plugs • Tubing	• Weatherstripping
RoHS Compliance	• RoHS Compliant		
Appearance	• Opaque		
Forms	• Pellets		
Processing Method	• Extrusion		

ASTM & ISO Properties ¹

Physical	Nominal Value	Unit	Test Method
Specific Gravity	0.980		ASTM D792
Melt Mass-Flow Rate (MFR) (230°C/2.16 kg)	0.80	g/10 min	ASTM D1238
Mechanical	Nominal Value	Unit	Test Method
Tensile Stress (100% Strain)	985	psi	ISO 527-2
Elastomers	Nominal Value	Unit	Test Method
Tensile Strength (Break)	1930	psi	ASTM D412
Tensile Elongation (Break)	710	%	ASTM D412
Hardness	Nominal Value	Unit	Test Method
Durometer Hardness (Shore D, 5 sec)	42		ASTM D2240

Additional Information

Hardness, Shore D, Instant = 48

Legal Statement


The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchaser assumes all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or others. There is no warranty of merchantability and there are no other warranties for the products described. For detailed Product Stewardship information, please contact us. Any product of Teknor Apex, including product names, shall not be used or tested in medical or food contact applications without the prior written acknowledgement of Teknor Apex as to the intended use. Please note that some products may not be available in one or more countries.

Processing Information

Extrusion	Nominal Value	Unit
Cylinder Zone 1 Temp.	330 to 400	°F
Cylinder Zone 2 Temp.	340 to 410	°F
Cylinder Zone 3 Temp.	350 to 420	°F
Cylinder Zone 4 Temp.	360 to 430	°F
Cylinder Zone 5 Temp.	360 to 430	°F
Die Temperature	374 to 440	°F

Revision Date: 4/13/2017

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.

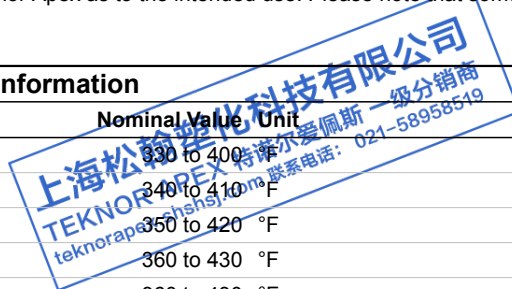

Sarlink® TPV 2940DN-1

Teknor Apex Company - Thermoplastic Vulcanizate

Extrusion Notes

Screw Speed: 30 to 100 rpm

Notes

¹ Typical properties: these are not to be construed as specifications.

Teknor Apex Company Corporate Headquarters

*In U.S. for Vinyls, TPEs, Colorants,
Engineered Thermoplastics (Chem Polymer)*

505 Central Avenue
Pawtucket, Rhode Island 02861 U.S.

Phone: 401-725-8000

Fax: 401-725-8095

Toll Free (U.S. only) 800-556-3864

info@teknorapex.com

Teknor Apex U.K. Ltd.

Tat Bank Road
Oldbury, West Midlands B69 4NH England

Phone: (44) 121-665-2100

Fax: (44) 121-544-5530

etpsales@teknorapex.co.uk

上海松翰塑化科技有限公司
TEKNOR APEX 特诺尔爱佩斯 一级分销商
teknorapex.shshsj.com 联系电话: 021-58958519

Revision Date: 4/13/2017

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.