

Medalist® MD-34065

Teknor Apex Company - Thermoplastic Elastomer

Friday, June 30, 2017

General Information

Product Description

Medalist MD-34065 is a high performance thermoplastic elastomer intended for use in medical and healthcare applications, particularly overmolding. Medalist MD-34065 is a medium hardness, low density grade with excellent bonding to PC, ABS, and PC/ABS.

General

Material Status	• Commercial: Active		
Availability	• Africa & Middle East • Asia Pacific	• Europe • Latin America	• North America
Uses	• Medical/Healthcare Applications • Pharmaceuticals		• Safety Equipment
RoHS Compliance	• RoHS Compliant		
Appearance	• Opaque		
Forms	• Pellets		
Processing Method	• Extrusion	• Injection Molding	

ASTM & ISO Properties ¹


Physical	Nominal Value	Unit	Test Method
Specific Gravity	1.00		ASTM D792
Melt Mass-Flow Rate (MFR) (190°C/21.6 kg)	6.4	g/10 min	ASTM D1238
Elastomers	Nominal Value	Unit	Test Method
Tensile Strength (Break)	1300	psi	ASTM D412
Tensile Elongation (Break)	600	%	ASTM D412
Hardness	Nominal Value	Unit	Test Method
Durometer Hardness			ASTM D2240
Shore A	75		
Shore A, 5 sec	73		
Additional Information	Nominal Value	Unit	
Adhesion to ABS			
Adhesion to PC			
Adhesion to PC/ABS			

Legal Statement

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchaser assumes all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or others. There is no warranty of merchantability and there are no other warranties for the products described. For detailed Product Stewardship information, please contact us. Any product of Teknor Apex, including product names, shall not be used or tested in medical or food contact applications without the prior written acknowledgement of Teknor Apex as to the intended use. Please note that some products may not be available in one or more countries.

Processing Information

Injection	Nominal Value	Unit
Drying Temperature	150	°F
Drying Time	2.0 to 4.0	hr
Rear Temperature	260 to 300	°F
Middle Temperature	280 to 320	°F
Front Temperature	300 to 340	°F
Nozzle Temperature	340 to 380	°F
Processing (Melt) Temp	340 to 380	°F
Mold Temperature	70 to 100	°F

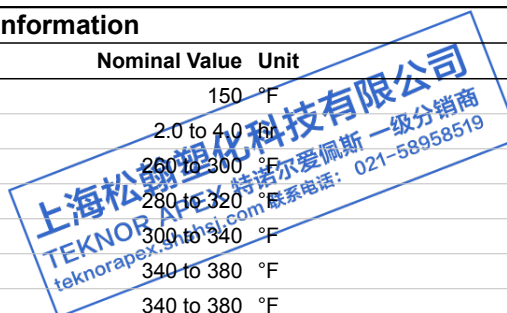

Revision Date: 7/15/2016

Medalist® MD-34065

Teknor Apex Company - Thermoplastic Elastomer

Injection	Nominal Value	Unit
Injection Pressure	200 to 800	psi
Back Pressure	25.0 to 100	psi
Screw Speed	50 to 100	rpm
Cushion	0.150 to 1.00	in

Injection Notes

Drying is suggested for enhanced bondability - Dry the pellets for 2 to 4 hours at 150°F (65°C).

Extrusion	Nominal Value	Unit
Cylinder Zone 1 Temp.	280 to 300	°F
Cylinder Zone 2 Temp.	300 to 320	°F
Cylinder Zone 3 Temp.	320 to 360	°F
Cylinder Zone 4 Temp.	320 to 360	°F
Cylinder Zone 5 Temp.	340 to 380	°F
Die Temperature	360 to 400	°F

Extrusion Notes

Screw Speed: 30 to 100 rpm

Notes

¹ Typical properties: these are not to be construed as specifications.

Teknor Apex Company Corporate Headquarters

*In U.S. for Vinyls, TPEs, Colorants,
Engineered Thermoplastics (Chem Polymer)*
505 Central Avenue
Pawtucket, Rhode Island 02861 U.S.

Phone: 401-725-8000
Fax: 401-725-8095
Toll Free (U.S. only) 800-556-3864

info@teknorapex.com

Teknor Apex U.K. Ltd.

Tat Bank Road
Oldbury, West Midlands B69 4NH England

Phone: (44) 121-665-2100
Fax: (44) 121-544-5530

etpsales@teknorapex.co.uk

上海松翰塑化科技有限公司
TEKNOR APEX 特诺尔爱佩斯 一级分销商
teknorapex.shshsj.com 联系电话: 021-58958519

Revision Date: 7/15/2016

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.