

Fireguard® 910-NL1

Teknor Apex Company - Flexible Polyvinyl Chloride


Friday, June 30, 2017

General Information

General			
Material Status	• Commercial: Active		
Availability	• Africa & Middle East • Asia Pacific	• Europe • Latin America	• North America
Features	• Flame Retardant • Low Smoke Emission		
Uses	• Insulation • Plenum Cable Jacketing		
Wire Types	• CL2P • CL3P	• CMP • FPLP	• MPP • OFNP
Agency Ratings	• NEC Article 725 • NEC Article 760 • NEC Article 770	• NEC Article 800 • UL 13 • UL 1424	• UL 1651 • UL 444 • UL QMTM2
RoHS Compliance	• RoHS Compliant		
Appearance	• Opaque		
Forms	• Pellets		
Processing Method	• Extrusion		

ASTM & ISO Properties ¹

Physical	Nominal Value	Unit	Test Method
Specific Gravity	1.59		ASTM D792
Mechanical	Nominal Value	Unit	Test Method
Tensile Strength (Break)	2550	psi	ASTM D638
Tensile Elongation (Break)	200	%	ASTM D638
Hardness	Nominal Value	Unit	Test Method
Durometer Hardness			ASTM D2240
Shore C	92		
Shore C, 10 sec	85		
Thermal	Nominal Value	Unit	Test Method
Continuous Use Temperature	167	°F	ASTM D794
Brittleness Temperature	21.2	°F	ASTM D746
Electrical	Nominal Value	Unit	Test Method
Dielectric Strength	840	V/mil	ASTM D149
Dielectric Constant			ASTM D150
1 kHz	4.67		
1 MHz	3.62		
Dissipation Factor			ASTM D150
1 kHz	0.080		
1 MHz	0.035		
Flammability	Nominal Value	Unit	Test Method
Oxygen Index	45	%	ASTM D2863

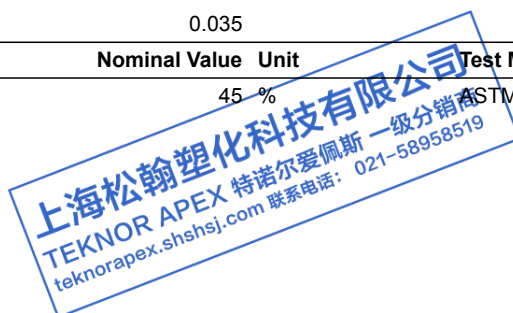

 上海松翰塑化科技有限公司
 TEKNOR APEX 特诺尔爱佩斯 一级分销商
 teknorapex.shshsj.com 联系电话: 021-58958519

Revision Date: 12/12/2013

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.

Fireguard® 910-NL1

Teknor Apex Company - Flexible Polyvinyl Chloride

Additional Information

Av.Sp. Extinction Area: 273 m²/kg
Avg. Heat of Combustion: 13.8 MJ/kg
Avg. Heat Rel. Rate: 64 kw/m²
Dynamic Heat Stability, 205°C, 100 rpm, 72 gms: 50
Kayeness ACR, 370°F, 1000 sec-1: 258 PA-sec

Peak Heat Rel. Rate: 119 kw/m²
Peak Smoke: 2.3
Specific Gravity, ASTM D792: 1.57 to 1.61 sp gr 23/23°C
TA Six Digit Description: 108-124
Total Heat Rel'd: 78 MJ/m²

Processing Information

Extrusion	Nominal Value	Unit
Melt Temperature	385	°F

Notes

¹ Typical properties: these are not to be construed as specifications.

Teknor Apex Company Corporate Headquarters

*In U.S. for Vinyls, TPEs, Colorants,
Engineered Thermoplastics (Chem Polymer)*
505 Central Avenue
Pawtucket, Rhode Island 02861 U.S.

Phone: 401-725-8000
Fax: 401-725-8095
Toll Free (U.S. only) 800-556-3864

info@teknorapex.com

Teknor Apex U.K. Ltd.

Tat Bank Road
Oldbury, West Midlands B69 4NH England

Phone: (44) 121-665-2100
Fax: (44) 121-544-5530

etpsales@teknorapex.co.uk

上海松翰塑化科技有限公司
TEKNOR APEX 特诺尔爱佩斯 一级分销商
teknorapex.shshsj.com 联系电话: 021-58958519

Revision Date: 12/12/2013

The information and recommendations contained in this bulletin are, to the best of our knowledge, accurate and reliable but no guarantee of their accuracy is made. All products are sold upon condition that purchasers shall make their own tests to determine the suitability of such products for their particular purposes and uses and purchasers assume all risks and liability for the results of use of the products, including use in accordance with seller's recommendations. Nothing in this bulletin constitutes permission or a recommendation to practice or use any invention covered by any patent owned by this company or by others. There is no warranty of merchantability and there are no other warranties for the products described.